

# The Paige® WALL BUSTER™

**The revolutionary two-part through wall wiring protection device for use in Plenum applications**

**Busts** material costs: Less expensive than current products

**Busts** labor costs: Snap fit takes seconds instead of minutes or hours

**Busts** need for large holes in the wall: 9/16 inch holes are all that is required


**Busts** wire failures: No sharp metal edges in contact with insulated conductors

**Busts** Code enforcement problems:

UL Listed & designed specifically for LED channel letters



**Busts** use location limitations, can be used in all locations including **Plenum** spaces.

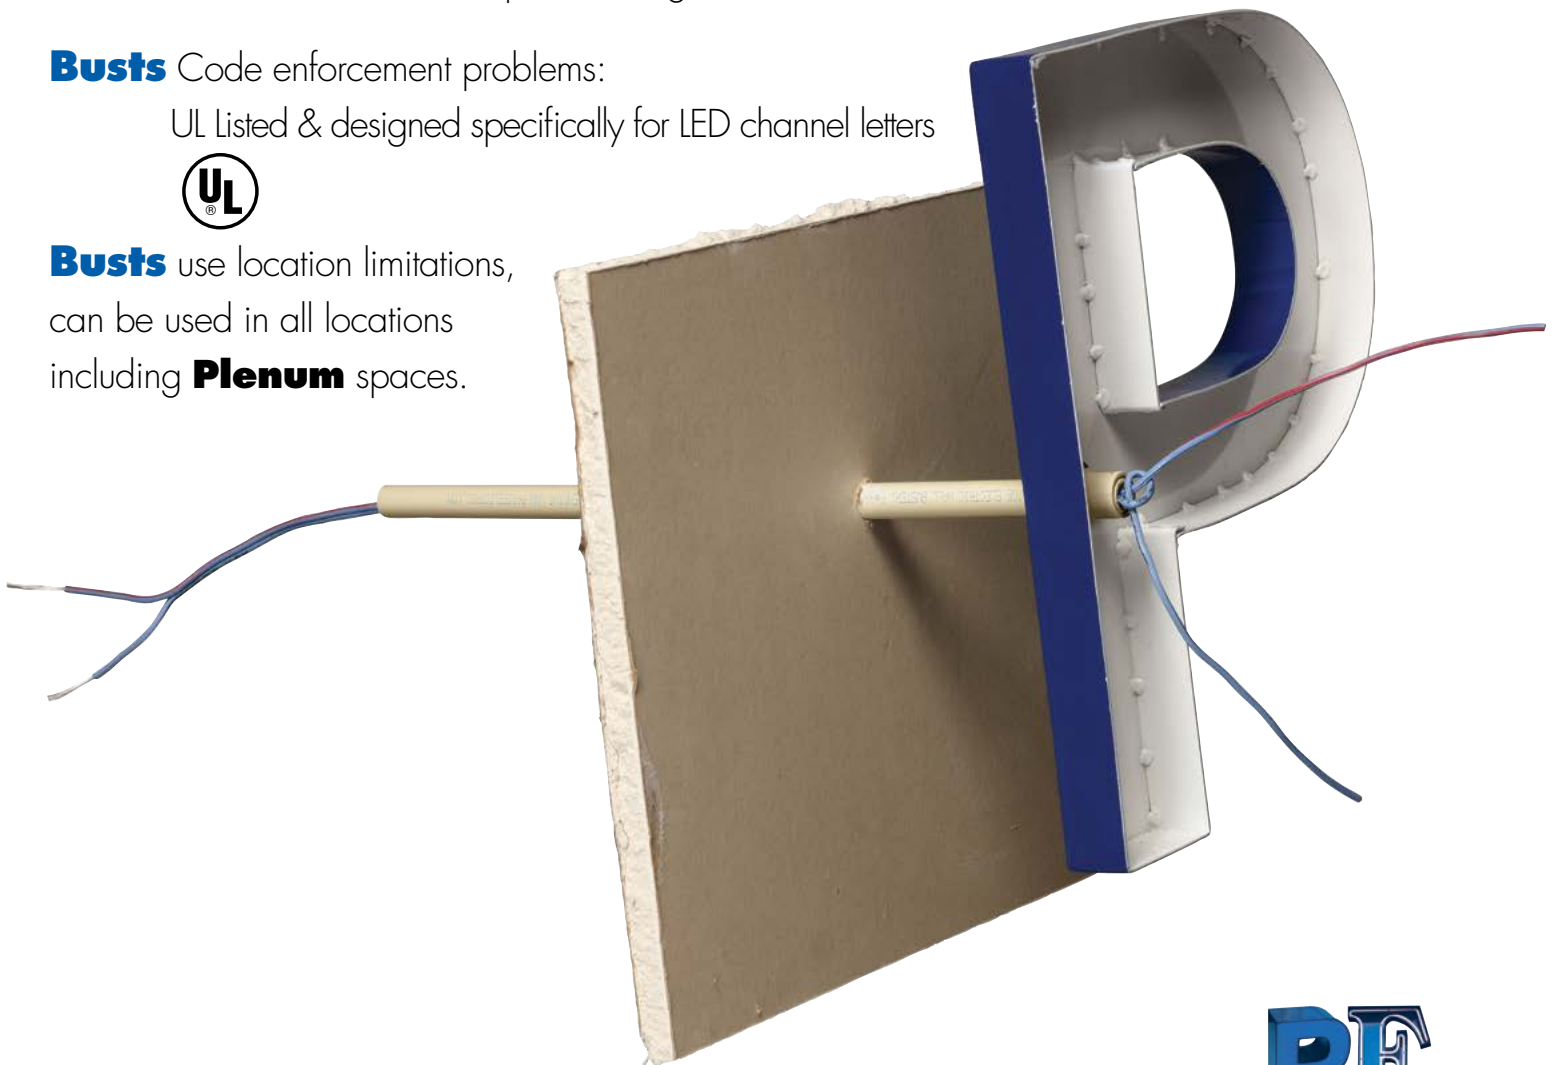


patented

Sales Office:  
Roxanne Tobia  
800.327.2443 Ext. 1150  
roxtobia@paigeelectric.com

Engineering Office:  
Roger Rumsey  
316.204.3062 (cell)  
rrumsey@paigeelectric.com

**PE**  
signwire  
accessories  
www.paigeelectric.com



**The Paige®**  
**WALL BUSTER™**

**The revolutionary two-part  
through wall wiring protection device  
for use in Plenum applications**



**Through Wall Protector  
for CL2, Driven  
Low Voltage Cables**

**1.0 SCOPE**

**1.1** This specification covers the through wall protection device "WALL BUSTER™" for use with CL2 Driven Low Voltage Cables.

Construction consists of one injection molded locking bushing and one through wall extruded locking tube.

**1.2 UV Resistant:**  
(UL 746)

**1.3 Fire & Flame Retardancy:**  
Complies (UL Listed) with the requirements for Plenum applications

**1.4 Sunlight Resistant:**  
Complies with f1 (UL 746C)

**1.5 Exterior Exposure:**  
UL Wet Listed.

**2.0 CONSTRUCTION**

**2.1 Locking Bushing: Part # 980001**

Injection molded white flame retardant polymer

2.1.1 1 inch hex base

2.1.2 .030 x .030 x 45 degree weather seal ramp

- 2.1.3 Standard -14 NPS threads (1/2 inch electrical fitting threads)
- 2.1.4 Double snap fit locks (locks both in and out when engaged).

**2.2 Tube: Through Wall Protector for CL2 Driven, Low Voltage Cables:**

- 2.2.1 Extruded tan Plenum rated polymer
- 2.2.2 Inside diameter 0.390"
- 2.2.3 O.D, 0.550"
- 2.2.4 Length 14" and 30"
- 2.2.5 One end beveled and channeled to lock in Bushing

**2.3 Surface Print:**

PAIGE ELECTRIC, WALL BUSTER™, P/N 98P0014 or P/N 98P0030, (UL) E339010, PLENUM RATED, SUNLIGHT RESISTANT, WET LISTED, PATENTED.  
WWW.PAIGEELECTRIC.COM

**2.4 Packages:**

50 Complete units per box  
(50 bushings + 50 Protection Tubes)

**2.5 Made in the USA:**

**Note:**

1/2" electrical lock nut not included.